

NDJ-8S Digital Viscometer



Parameters


Measuring Range (mPa·s)	20 ~ 2,000,000
Rotating Speed (RPM)	Eight adjustable speed:0.3、 0.6、 1.5、 3、 6、 12、 30、 60
Number of Spindles	Spindles (Code L1,L2,L3,L4) are equipped with the product
Accuracy	±1% full scale range in use
Return Capacity	±0.5% full scale range in use
Power	Power adapter (input: 100-240V, 50/60Hz)
LCD screen display	The LCD screen can display the viscosity, speed, torque, spindle and the maximum viscosity can be measured in the current spindle speed value.
Apparatus to be equipped · Digital viscosity meter1 pee · Ascending and falling rack1 set · Standard spindle1 set · Power adapter1 pee · Protective frame of spindle1 pee · Spanner1 pee · Seat and leveling feet1 set · RS232 standard output interface1 pee	Options · Extreme low viscometer adapter (with one spindle L0) · Small sample adapter (with spindle 21, 27, 28 and 29 each) · Spindle L5 · Temperature-controlled heater (with spindle 21, 27, 28 and 29 each) · RTD temperature probe · Specially used printer

Range (mPa-s) Rotor No. Model	L0*	L1	L2	L3	L4	L5*	R1*	R2	R3	R4	R5	R6	R7	21	27	28	29
NDJ-5S	1-100	20-1K	100-5K	400-20K	2K-100K	4K-200K	—	—	—	—	—	—	—	17-833	83-4.2K	167-8.3K	333-16.7K
NDJ-8S	1-2K	20-20K	100-100K	400-400K	2K-2M	4K-4M	—	—	—	—	—	—	—	17-16.7K	83-83.3K	167-166.7K	333-333.3K
SNB-1	1-600	20-6K	100-30K	400-120K	2K-600K	4K-1.2M	—	—	—	—	—	—	—	17-5K	83-25K	167-50K	333-100K
SNB-2	0.6-6K	12-60K	60-300K	240-1.2M	1.2K-6M	2.4K-12M	—	—	—	—	—	—	—	10-50K	50-250K	100-500K	200-1M
SNB-3	6-60K	160-800K	800-4M	3.2K-16M	16K-80M	32K-160M	—	—	—	—	—	—	—	100-500K	500-2.5M	1K-5M	2K-10M
SNB-AI	3-60K	—	—	—	—	—	—	—	—	—	—	—	—	50-500K	250-2.5M	500-5M	1000-10M
LVDV-1	0.6-6K	12-60K	60-300K	240-1.2M	1.2K-6M	2.4K-12M	—	—	—	—	—	—	—	10-50K	50-250K	100-500K	200-1M
RVDV-1	6-60K	—	—	—	—	—	20-100K	80-400K	200-1M	400-2M	800-4M	2K-10M	8K-40M	100-500K	500-2.5M	1K-5M	2K-10M
HBDV-1	50-500K	—	—	—	—	—	160-800K	640-3.2M	1.6K-8M	3.2K-16M	6.4K-32M	16K-80M	64K-320M	800-4M	4K-20M	8K-40M	16K-80M
LVDV-2	0.3-6K	6-60K	30-300K	120-1.2M	600-6M	1.2K-12M	—	—	—	—	—	—	—	5-50K	25-250K	50-500K	100-1M
RVDV-2	3-60K	—	—	—	—	—	10-100K	40-400K	100-1M	200-2M	400-4M	1K-10M	4K-40M	50-500K	250-2.5M	500-5M	1K-10M
HBDV-2	25-500K	—	—	—	—	—	80-800K	320-3.2M	800-8M	1.6K-16M	3.2K-32M	8K-80M	32K-320M	400-4M	2K-20M	4K-40M	8K-80M

- 打*转子为选配件；
 - 21、27、28、29号转子为选配少量样品适配器；温控加热器的标准配置；
 - K=1000 M=1000000
- 1.Spindles with mark * are optional
2.The No. 21, 27, 28 and 29 Spindles are equipped with small sample adapter which is optional;
temperature-controlled heaters are standard.
3.K=1000 M=1000000

转子

Spindles

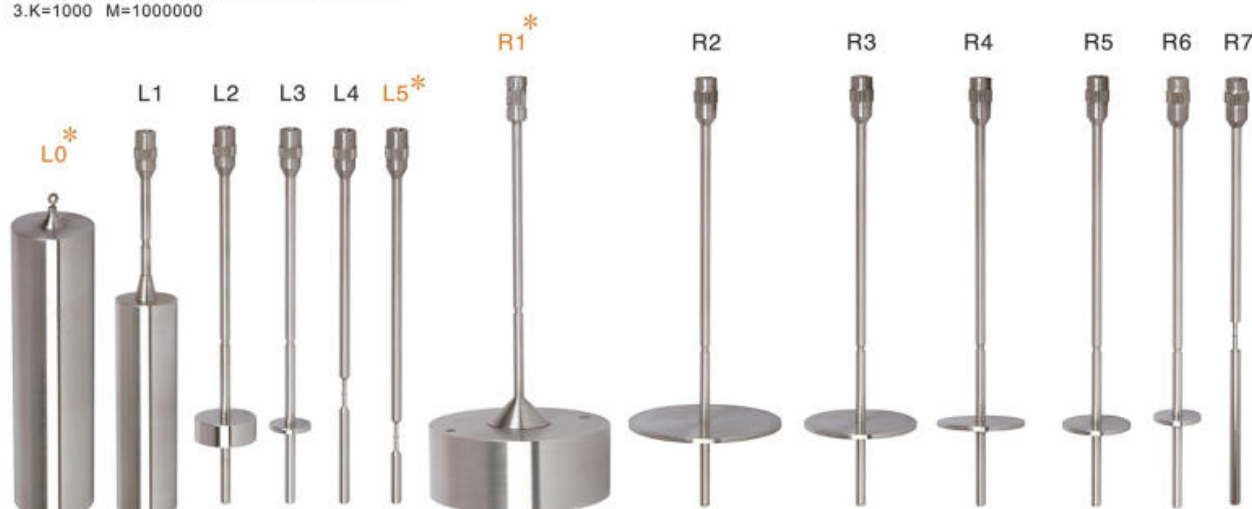

NDJ/SNB/LVDV标准配置L1~L4转子
L1~L4 Spindles are standard for NDJ / SNB / LVDV



RVDV/HBDV标准配置R2~R7转子
L0/L5/R1转子可选配件
R2~R7 Spindles are standard for RVDV/HBDV.
L0/L5/R1 Spindles are optional.